

# Standard Sensor Thermocouple

## Part number format:

Sample PN: STC-2002-L12-0

STC - 2002 - L12 - 0  
A B C

## Sensor Configuration

STC - Thermocouple

### A

#### Birk PN/Thermocouple Type:

2000	Type J 30AWG Fiberglass
2001	Type J 24AWG Fiberglass
2002	Type J 30AWG Teflon
2003	Type J 24AWG Teflon
2004	Type K 30AWG Fiberglass
2005	Type K 24AWG Fiberglass
2006	Type K 30AWG Teflon
2007	Type K 24AWG Teflon

### B


#### Lead length:

L12	12" leads
L18	18" leads
L24	24" leads
L36	36" leads

## Birk Quality and Accuracy

Birk Sensors provide a cutting edge ability to more accurately measure the output of your application and convert the information to be used for observation.

Our complete list of thermocouples is listed below.

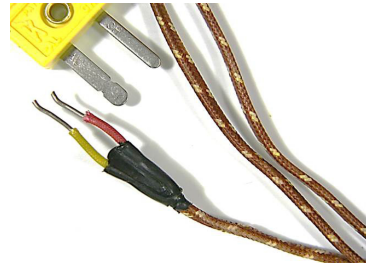

### C

#### Connector:

- 0 - No
- 1 - Yes